

MOSQUITO MK4

Anti Graffiti System



CONSIDERATIONS PRIOR TO INSTALLATION

The Mosquito can be used internally or externally (in its current configuration) and the volume level can be adjusted as required. When installing, ensure that consideration is given to neighbours as there is a risk of annoyance to innocent parties.

- ✓ The device should ideally be used in areas where the Police or Local Authorities have already identified a history of anti-social behavior.
- ✓ Deployment must only take place at premises with the written consent of the owner or a nominated representative entitled to give such consent.
- ✓ Consultation should also take place with other persons or premises in the vicinity that are likely to be affected either personally or by way of trade.
- ✓ To avoid damage or theft, the device should only be fitted well out of reach with a mesh or other protective grill covering it.

- ✓ The device should only be used at times when groups of youths habitually gather together and are actively causing nuisance.
- ✓ An assessment should be carried out to check who else could be affected. For example, are there bus stops or seating areas where persons may lawfully wait, or premises intended for use by young people nearby? The device should only be installed after all other reasonable methods to move youths have been tried.
- ✓ It should be noted that the device might not always resolve the problem and installation of the device should always be accompanied by a subsequent monitoring and evaluation.


MOSQUITO MK4

The Mosquito is a device intended to disperse groups of young people who are acting in an anti-social manner who are causing or likely to cause harassment and distress to other members of the public in the vicinity as they go about their everyday business. Although the Mosquito Unit is very simple to install, it is recommended that if you are not familiar with electrical work, and electrician is employed to complete the installation. If there are any queries during this process, please contact SLS Retail Theft Control before continuing.


SPECIFICATIONS:

- ✓ Voltage: 15V AC
- ✓ Cable: 0.28mm² - 2.5mm²
- ✓ Outdoor Use: Weatherproof
- ✓ Current: -400mA
- ✓ Temperature Range: -25oc - +55oc


Bracket Wall Method

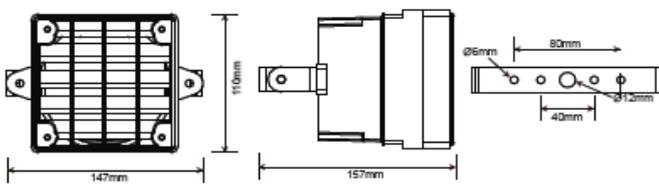


Direct Wall Mounting

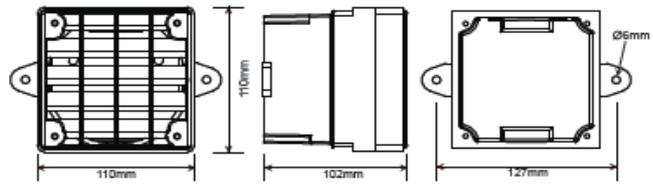


Back Box Preparation

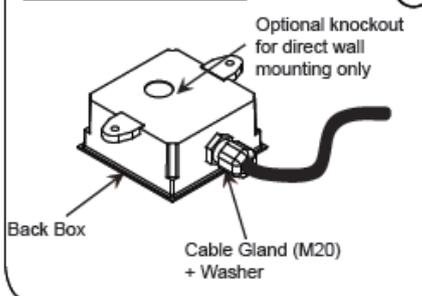


Direct Wall Mounting

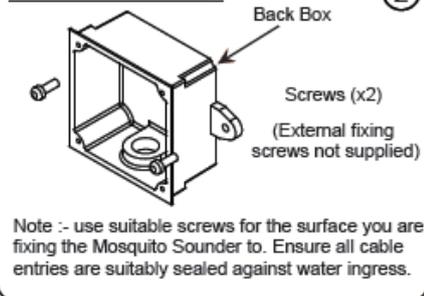

Bracket Wall Method

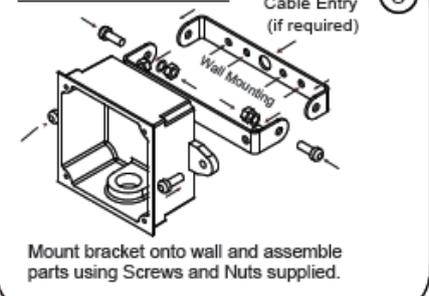

Connections

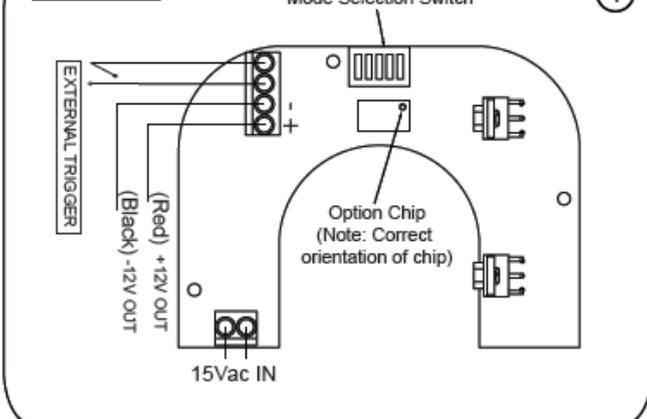


Switch Settings

Mode Select Switch

Switch Setting			Sound Volume Levels			
1	2	3	4	5	*High Power	*Low Power
Trigger Options	Tone Type	Audible BEEP	Open	Open	104db	94db
OPEN	*Sound 1 Minute	High Frequency	Open	Closed	100db	90db
CLOSED	*Sound 5 Minutes	Low Frequency	Closed	Open	96db	86db
			Closed	Closed	94db	84db

* 1. Note: All these settings are dependent on the Chip Option Fitted.
 2. Sound volume levels approximate only

Positioning

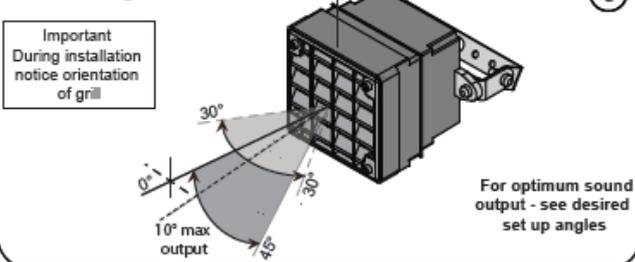

Final Assembly

